



Hammerhead 300SC

Supercharged with Intercooler for Optimum Low End Performance

Peak Torque at 1800 RPM

V8 Configuration Yields an Effortless Installation for Repowers

Exclusive Supercharged Design is Smoke Free and Odor Free

Superior Corrosion Protection with Ceramic Coated Exhaust and Stainless Steel Risers

Specifications:

Power (at crankshaft)	300HP (224kW)
Configuration	V8
Displacement	396 cid
Rated RPM	3600
Cruising RPM	2800-3200
Dry Weight	948 lb (430 kg)
Aspiration	Supercharged with Intercooler
Bore and Stroke	103 x 97mm
Compression	18:1
Cooling System	High Capacity Freshwater Cooling
Exhaust	Ceramic Coated with Stainless Steel Risers
Corrosion Protection	Corrosion Resistant Marine Paint and Anodes
Remote Oil Filter	Standard
Charging System	105 amp / 12V
Environmental	EPA Tier II, EU and IMO Compliant
Warranty	2 Year Limited Factory Warranty (Pleasurecraft)



Standard Features

- High Capacity Closed Cooling System
- Ceramic Coated Exhaust with Anode
- Stainless Steel Risers
- Engine Mounts with Rubber Isolators
- 9 Pin Instrument Harness Connector
- 105 amp Alternator
- Multiple Sterndrive, Transmissions, and Jet Options
- Remote Engine Oil Filter / Freshwater Flush Kit

Options:


- Instrument Panel
- Powder Painted Exhaust
- Stainless Steel Headers
- Perfect Pass Ready
- LED Engine Monitoring Display
- Fuel Water Separator
- Y Harness For Multiple Stations
- Extended Warranty

Factory Authorized Sterndrive Packages*


- Bravo One Diesel X
Available Ratios: 1.36, 1.50, 1.65:1
- Bravo Two Diesel X
Available Ratios: 1.50, 1.65, 1.81, 2.00, 2.20:1
- Bravo Three Diesel X
Available Ratios: 1.36, 1.50, 1.65, 1.81, 2.00, 2.20, 2.43

*Sterndrive warranty for 250HP and up engine models are application specific and are subject to approval by MarineDiesel

Power

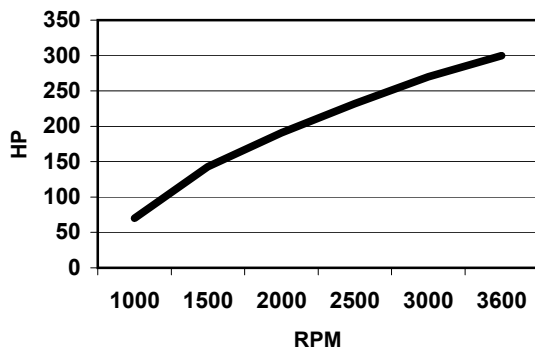

Torque

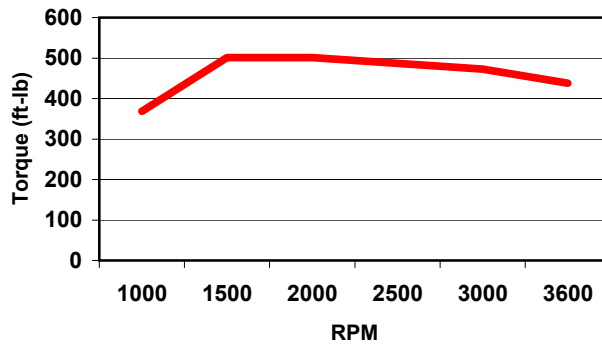

(Turn over for Installation Drawing)